



Realgain - 4 G.SHDSL Modem

Overview

Realgain 4 G.SHDSL modems offer extended distances and variable data rates from 64 kbps to 4608 kbps using G. SHDSL technology. The modem using a single pair offers capabilities equivalent to normal HDSL modems on two pairs, offering 50% saving in copper cost. The modem supports G.703 E1, G.703 Co-directional, V.35 and X.21 interfaces. It also supports Ethernet interface with a built-in bridge allowing LAN-to-LAN connectivity. G.SHDSL technology extends transmissions farther than any other DSL technology, opening the door for service providers to deliver low cost, multi-service, broadband access to a wider subscriber base. The technology also offers interoperability, flexibility to the users to use different makes of compatible G.SHDSL modems at two ends.



Key Features

- Provides High-speed data connectivity on Two/Single unconditioned twisted copper pairs/pair.
- Tolerates bridge taps and cable gauge changes. For enhanced performance also supports Asymmetrical PSD mode.
- Operates at multiple data rates between 64 kbps and 4608 kbps enabling single-platform system upgrades.
- Supports G.703 E1, G.703 Co-directional, V.35, 10/100 Base-T and X.21 interfaces, allowing connection to different DTE types.
- Optionally, Realgain-4 also supports multiple interfaces providing time slot sharing between G.703, V.35 & Ethernet Interfaces, configurable through front end user interface.
- The modem supports an Embedded Operation Channel (EOC) for controlling, configuring and supervising the remote unit. The channel uses G. SHDSL overhead bits, operating without interfering with the data transmission in compliance with the ITU-T G.991.2 requirements.
- Various types of enclosures including standalone, rack/standard 19" shelf are supported.
- 15 Nos. of Systems can be incorporated in a 19" Shelf.
- LCD display is provided (16x2) for system status & Configuration.
- Supports SNMP V1/V2 for extensive diagnostics, including loop-backs, G. SHDSL and E1 Performance monitoring
- Structured and unstructured modes, locally settable, provided.
- Complies with EMI/EMC specifications CISPR 22 {1993} for Class B equipment.
- OAM operations through VT 100 dumb terminal.
- 160 to 240VAC and -36 V to -60 VDC

Applications


- 64-Kbps Co-directional leased line applications.
- 2.048 Mb/s structured and unstructured. P2P & P2MP applications.
- Public switch to ISDN/PABX switch.
- Client-to-Client (2-pair) @ 4.608 Mb/sec and N x 64 Kb/s (where N= 1 to 72).
- Client-to-Client (1-pair) @ 2.304 Mb/sec and N x 64 Kb/s (where N= 1 to 36).



Realgain - 4 G.SHDSL Modem

- Network to Client @ 2.048Mb/sec and N x 64 Kb/s (where N= 1 to 32).
- Network to client @ 2.048 Mb/sec with time slot sharing between V.35, Ethernet & G.703 Interface. This enables user to interface PABX, Router & switch simultaneously.
- LAN Bridging.

Application Diagram

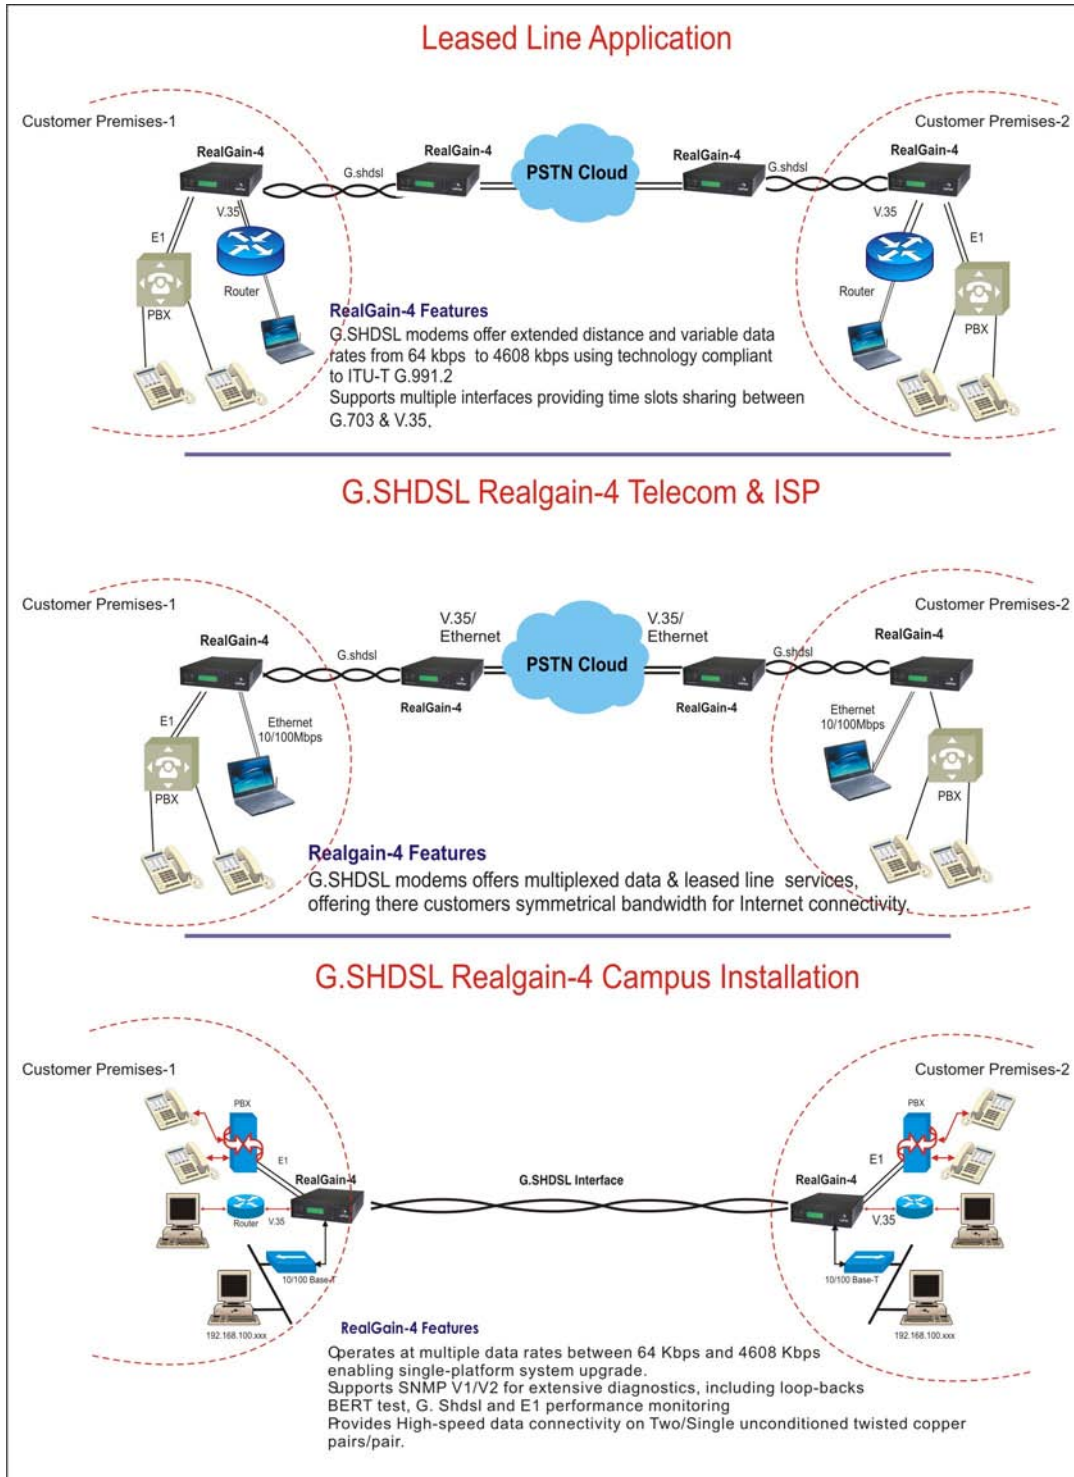



Realgain - 4 G.SHDSL Modem

Specifications

Model	Realgain-4
Hardware Specifications	
Power supply	230 VAC (160V to 240V) / -48 VDC (-36V to -60V)
Dimensions	Single Slot (S. S.) Enclosure: 245 x 306 x 62 mm & 19" shelf: 586 x 355 x 435 mm
Operating environment	-15 ~55 degree C, 5%~90%RH
Interfaces	
DSL Line	G.SHDSL compliant to G.991.2, ETSI 101 524
Copper pairs	Two/One. Refer Table 1 & 2 for the reach
Line Coding & Impedance	TC-PAM line coding; 135 Ohms
Protection	ITU K.20 & K.21
Connectors	RJ45 & Terminal Block
Network Interface	
G.703	120 Ohms /75 ohms network interface
Standards	Complies with G.703, G.704, G.706 & G.732
Modes	Structured / Unstructured modes
Line Code	HDB3
	LIU Sensitivity: (I) Short Haul.0 to -6dB (II) Long Haul.0 to -34dB (III) Ext. Long Haul. -20 to -48dB
Clock Options	Internal Clock/ External Clock/ G.703 Recovered Clock
Connectors	RJ45/Terminal Block & BNC
G.703 Co-directional	120 Ohms /75 ohms network interface
Standards	Complies with G.703
Line Code	AMI
Clock Options	Internal Clock/ External Clock/ G.703 Recovered Clock
Connectors	RJ45/Terminal Block & BNC
Synchronous Interface V.35/V.36/X.21/RS530	Standard M34 pin Connector
	Client interface providing up to 2.048 Mb/sec data
	N x 64 Kbps (N=1 to 32) user configurable as bandwidth requirements
	DTE, DCE soft configurable (Optional)
Control signals	DTR,DSR,DCD etc signals are supported
Clock/data	Inverting/Non-inverting Slave/Loop
Ethernet	Compliance to Ethernet & IEEE 802.3 standards
Protocol	Supports standard HDLC protocol
	10/100 Base-T (RJ-45), IEEE 802.3,802.3u, half & full duplex
MAC address	Dynamically learning and aging up-to 2048 MAC addresses



Realgain - 4 G.SHDSL Modem

RealTime Systems Ltd.

RealTime Systems Ltd.

Management	
Front panel LEDs	<ul style="list-style-type: none"> • Power supply Indication, • Sync1 & Sync 2: G.SHDSL synchronization. • Margin (1/2): Indicates status of link as marginal on pair-1 & pair-2. • TD/RD: Transmit & Receive data. • LOS: Loss of E1/Co-directional signal. • Fault: E1 /Co-directional Faults (LOS, AIS or Loss of frame). Test: System under TEST.
LCD with front panel switches	16x2 LCD for System Information, Configuration & Fault Diagnostics
Loop backs	<ul style="list-style-type: none"> • Compliant to ITU V.54 • Exchange-to-Exchange loop back at LTU • Exchange-to-Exchange loop back at NTU • Customer-to-Customer loop back at LTU • Customer-to-Customer loop back at NTU
BER meter	Yes with PRBS generator of 2E11-1 & various data patterns. Compliant to V.52 & O.152
SNMP v1/v2 & Telnet	SNMP Management via Ethernet port

Table (1) Typical distance over Single Pair

Data Rate (in Kbps)	Distance(Km)@ 24 AWG (0.51 mm) UTP
64	12.0
128	11.0
256	8.0
512	7.0
1024	6.2
2048	5.5
2304	4.2



Realgain - 4 G.SHDSL Modem

Table (2) Typical distance over Two Pairs.

Data Rate (in Kbps)	Distance(Km)@ 24 AWG (0.51 mm) UTP
384	8.7
512	8.0
1024	7.0
2048	6.2
4096	5.0
4608	4.2

Ordering Information

RTS- Realgain-4- XXXX – YY
 XXXX (Options)

XXXX	Interface
052A	G.703 (E1)
052B	V.35
052C	V.35 & G.703 (E1)
052D	Ethernet
052E	Ethernet/V.35
052F	G.703 & V.35 & Ethernet with Time slot Sharing(Optional)
052G	G.703 (64 Kbps Co-Directional) Interface.
052H	G.703(E1) & V.35 With Time slot Sharing.(optional)



Realgain - 4 G.SHDSL Modem

YY (Features)

Features (YY)	Copper pair		Power Options	Mechanical	
	2-wire	4-wire		Single Slot Chassis	19" Shelf Mounted
00	√	–	220VAC	√	–
01	√	–	48VDC	√	–
02	√	–	220VAC/48VDC	√	–
03	–	√	220VAC	√	–
04	–	√	48VDC	√	–
05	–	√	220VAC/48VDC	√	–
06	√	–	48VDC	–	√
07	–	√	48VDC	–	√

- Indicates, respective feature is available in that particular model.
- Please contact factory for customer specific requirements.

Manufactured By:
RealTime Systems Ltd.
 247/29, Block-D, Sector-63
 Noida-201301 (UP)
 Ph.No. +91-120-4141500
 Fax No:+91-120-4141549
 E-mail:inquiries@rtsindia.com



Visit us: rtsindia.com

"Most Reliable Networking Products"

RealTime reserves the right to change or modify or update or clarify specifications without notice in the interest of Technological advancement